

**Zero Bias Detector With N Male to BNC Female
 and Negative Video Out Operating From 10 MHz to
 18.5 GHz**

The SMD0018 is a zero bias Schottky detector that displays an extremely flat frequency response over a broad frequency range from 10 MHz to 18.5 GHz. The model features negative video output polarity and operates over a wide dynamic range of -30 dBm to +20 dBm input power. No external DC bias source is required. Performance includes 50 ohm matched inputs for excellent VSWR of 1.5:1 typical, high voltage sensitivity for very small signal detection of 400 mV/mW typical, and can withstand maximum input power levels up to +20 dBm CW. Operating temperature range is 0°C to +90°C. The compact and rugged cylindrical package supports an N Male input connector and BNC Female output connector and is ideal for use with precision test and measurement, instrumentation, and subsystem assemblies.

Electrical Specifications

Description	Min	Typ	Max	Unit
Frequency Range	10 MHz		18.5 GHz	
VSWR		1.5:1	1.7:1	
Voltage Sensitivity		400		mV/mW
Flatness		±0.5	±0.6	dB
Input Power			+20	dBm
Video Capacitance		470		pF
Dynamic Range	-30		+20	dBm

Mechanical Specifications

Temperature

Operating Range -54 to +100 deg C
 Storage Range -65 to +100 deg C

Size

Length 2.41 in [61.21 mm]
 Weight 0.13 lbs [58.97 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level



Features:


- Zero Bias Schottky Diode Detector
- 10 MHz to 18.5 GHz Frequency Range
- Extremely Flat Frequency Response
- Maximum Input Power +20 dBm, Peak Input Power +27 dBm
- Negative Video Output Polarity



Applications:

- Electronic Warfare
- Test & Measurement
- System Monitoring
- AM Noise Measurements
- Military & Space
- Radar
- Pulsed RF Measurements in Ultra Broadband Applications
- Leveling Pulse Signal Sources
- Military Communications Systems

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

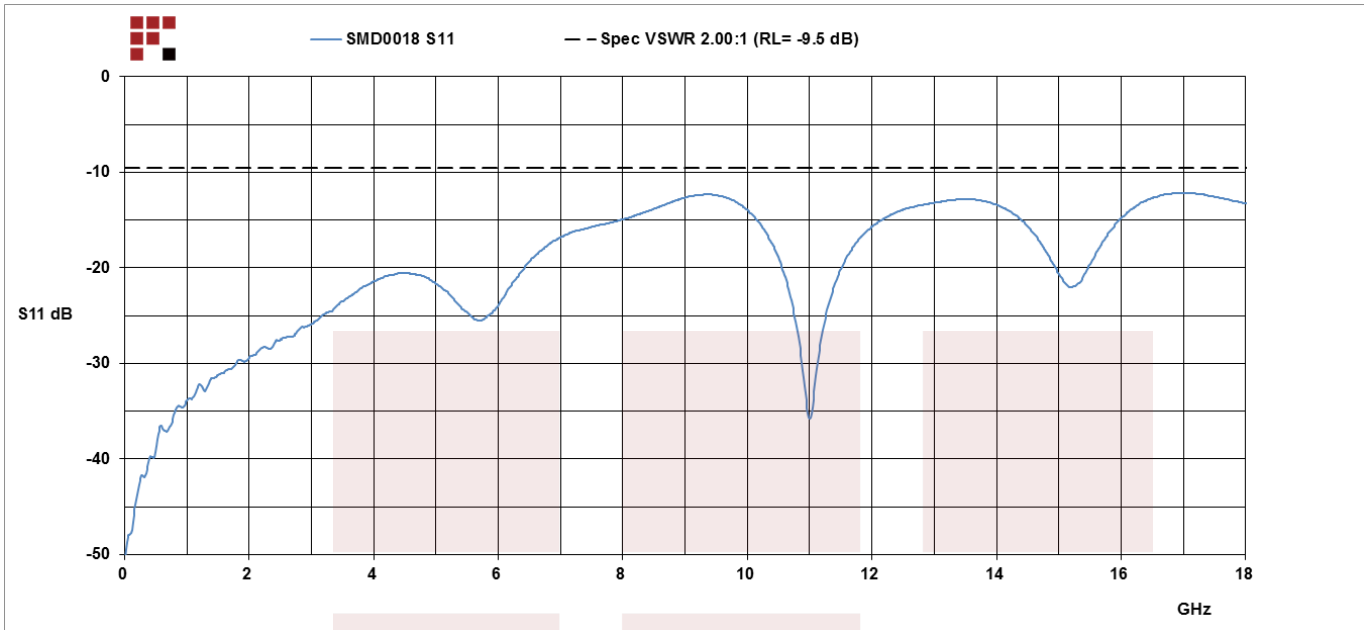

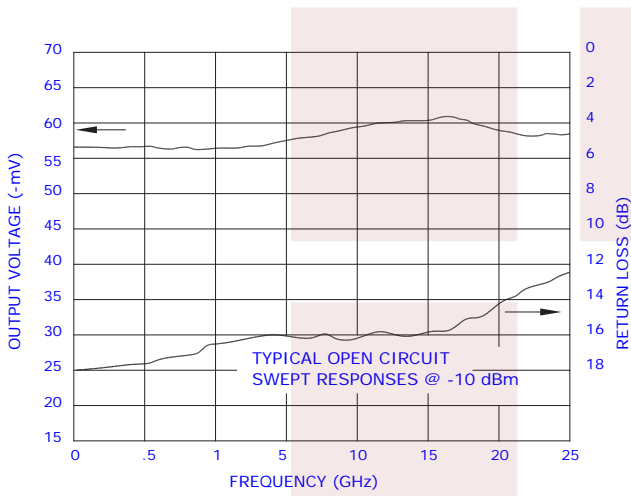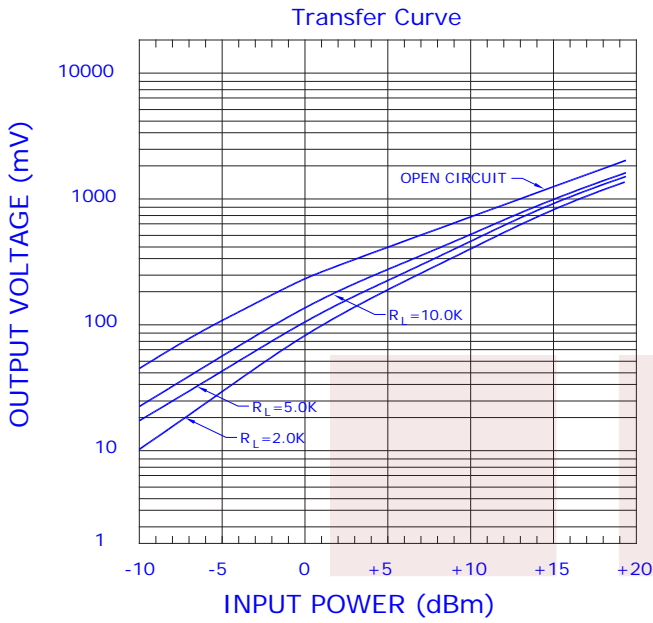



Zero Bias Detector With N Male to BNC Female and Negative Video Out Operating From 10 MHz to 18.5 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Zero Bias Detector With N Male to BNC Female and Negative Video Out Operating From 10 MHz to 18.5 GHz SMD0018](#)

URL: <https://www.fairviewmicrowave.com/zero-biased-detector-n-male-10-mhz-18-ghz-smd0018-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

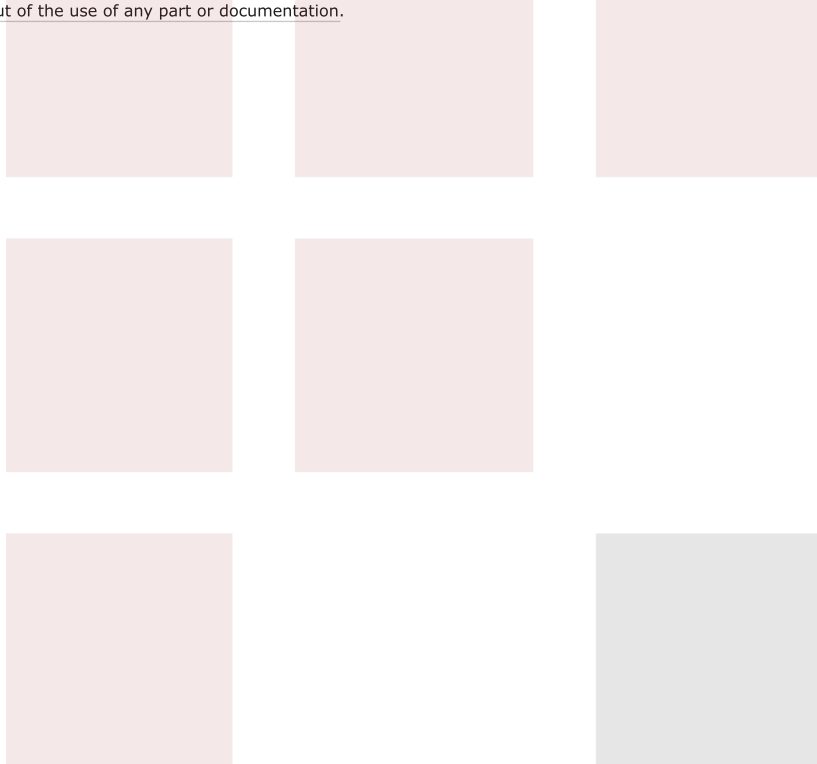

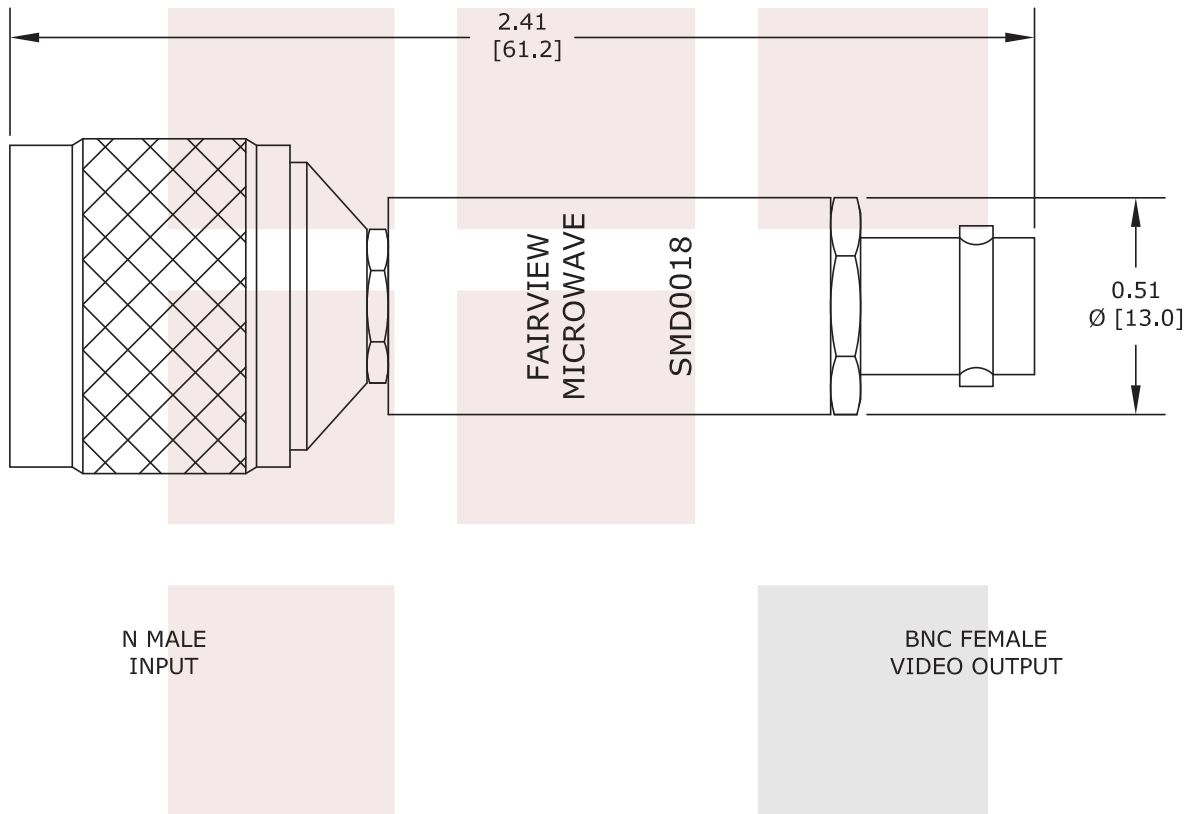

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Zero Bias Detector With N Male to BNC Female and Negative Video Out Operating From 10 MHz to 18.5 GHz		DWG NO		CAGE CODE	
		SMD0018		3FKR5	
CAD FILE	091616	SHEET	SCALE	N/A	SIZE A 2233